

Comparing available rainfall gridded datasets for West Africa and the impact on rainfall-runoff modelling results, the case of Burkina-Faso

Gil Mahe^{1*}, Sabine Girard¹, Mark New², Jean-Emmanuel Paturel³, Agnes Cres¹, Alain Dezetter³, Claudine Dieulin¹, Jean-François Boyer¹, Nathalie Rouche¹ and Eric Servat¹

¹HydroSciences, Case MSE, University Montpellier 2, 34095 Montpellier Cedex 5, France

²School of Geography, Centre for the Environment, University of Oxford, South Parks Road, Oxford, OX1 3QY, England

³Institut de Recherche pour le Développement, BP 2528 Bamako, Mali

Abstract

Monthly rainfall data in Burkina-Faso, West Africa, over a period of 77 years are extracted from three different gridded data sets, available either on the web: *CRU* (Climatic Research Unit, Norwich, UK), *SIEREM* (HydroSciences Montpellier, France), or from the National Meteorological Center of Burkina-Faso. With a view to modelling the runoff-rainfall relationship at the monthly time step, these data are used at the 0.5°*0.5° scale. Despite mean, minimum, standard deviation and inter-annual variability being very similar for the period 1922 to 1998, the three gridded data sets used show an important spatial variability of values with time, and some differences are observed which lead to significantly different runoff-rainfall simulations. Comparison of the rainfall grids has shown that differences between the precipitation grids are more pronounced during years when the rainfall is lower; this also applies to areas where the rainfall is lower. The three different rainfall grids produce differences in mean rainfall of 4 to 11%, depending on the grids that are compared. While these results are obviously specific to the station networks and interpolation method used, they provide an indication of the differences that can arise.

It is recommended that as many stations as possible are used to better assess areal rainfall. These biases have a strong influence on the results of the runoff-rainfall modelling (using the GR2M conceptual model): the Nash criteria show differences of about 20% and calculated flow of 30% to 40%. This study illustrates the levels of uncertainty when using available rainfall gridded data sets, for rainfall-runoff studies in West African developing countries, which is important in the context of predicting water resources for the future from the GCM outputs for the 21st century.

Keywords: Burkina-Faso, database, runoff, rainfall, rainfall-runoff modelling, West Africa

Introduction

Accurate simulation/estimation of river flows is important for numerous applications in water resource planning and management. If we exclude the problem of gathering runoff data from African countries, where the observations within the national networks were often interrupted during the 1980s (Mahe and Olivry, 1999), in most catchments there are two major sources of uncertainty that limit accuracy: hydrological modelling (structure and parameterisation) and climate data (especially precipitation) used to drive hydrological models. The latter is a particular problem in most developing countries where meteorological networks are relatively sparse in time and space. For large-scale hydrological modelling, a common approach is to use gridded climate data as input to a gridded rainfall-runoff model, where the hydrological grids are linked to a drainage network. For example, in West Africa Ouedraogo et al. (2001) suggest a semi-distributed conceptual modelling of rainfall-runoff at the monthly time step to study climatic variation and its impacts on hydrological variability (Paturel et al., 2003a; 2003b). Such an approach allows the prediction of the depth of runoff from latitude/longitude grids of rainfall, potential evapotranspiration and soil-water capacity. Many publications on this topic have appeared about Southern Africa, among which Hughes (1995) or Lee and Oh (2006), which use different kinds of rainfall-runoff models for water resource assessment purposes. In

West Africa rainfall-runoff models are most sensitive to rainfall, and it is therefore important to understand biases of rainfall data before their use in a water resource model (Paturel et al., 2003b), and the effect of these biases on predicted runoff and river flow (Lee and Oh, 2006; Rubarenzya et al., 2007). But accessibility to data is a serious problem limiting research performance.

This paper is not about the relationships between rainfall distribution and runoff modelling (others like St-Hilaire et al., 2003; Dong et al., 2005; and Lee and Oh, 2006 have done this) or about how well or not the existing data sets allow reproduction of the 'real' – or most probable – rainfall fields. The purpose of this paper is to evaluate data from three gridded rainfall data sets of monthly rainfall available for Burkina-Faso over the period 1922 to 1998, and to analyse the consequences of each choosing one of them on the simulated river flows in 5 basins across Burkina-Faso. The aim is to process the data as though we were in the situation of a non-specialist rainfall data-set user, who will use only one source of data, ignoring the consequences.

Data and rainfall grids

Access to rainfall data in West Africa

Raw data: Raw data are rarely available for free through the National Meteorological Services, and costs are sometimes very high, although the WMO 40th resolution asks for the free exchange of data for research and educational purposes (WMO, 2001). In their own countries, African researchers often have great difficulties to obtain access to rainfall data, and especially recent data (e.g. after 1990).

* To whom all correspondence should be addressed.

☎ 33 (0) 4 67 14 90 15; fax: 33 (0) 4 67 14 47 74;

e-mail: gil.mahe@msem.univ-montp2.fr

Several international institutions and laboratories have gathered raw data for internal research purposes, but they have not made these data available on the web, to respect the limitations placed on distribution by the National Meteorological Services, except the GHCN (Global Historical Climatology Network -NOAA) which provides web access to monthly climate data for synoptic station data supplied by the National Meteorological Services. The IRD (ex-ORSTOM) gathered raw data up to 1980 for a number of African countries, in terms of a contract with CIEH (Comite Inter-africain d'Etudes Hydrauliques) and ASECNA (Agence pour la SECurite de la Navigation Aerienne en Afrique et a Madagascar), but is not allowed to release them. This IRD database served as a basis for the FRIEND-AOC dataset (Flow Regimes from International and Experimental Network Data –UNESCO/PHI –Afrique de l'Ouest et Centrale). The FRIEND-AOC dataset has been set up along with the FRIEND-AOC UNESCO program since 1994. This is a research network involving about 200 hydrologists and climatologists from West and Central Africa who can access the database via their research theme leaders (FRIEND-AOC, 2007). However, there are only a few data after 1990. This database is managed and updated by the University Cheikh Anta Diop of Dakar (Senegal).

Another regional database for West Africa is located at the AGRHYMET Centre of Niamey (regional centre for Agro-Hydro-Meteorology), Niger. This database has been compiled for the CILSS countries (Comite inter-africain de lutte contre la secheresse au Sahel), with the contribution of each CILSS country, but it is basically not accessible outside AGRHYMET or CILSS purposes, even to African researchers.

Gridded data sets: Research Laboratories like CRU (Climatic Research Unit, UEA, Norwich UK) or HSM, or international institutions like NOAA, through local and restrictive partnership research contracts, release 'elaborated' data sets, like gridded rainfall, most often at the 0.5°*0.5° scale. Gridded data sets, most of them covering the world at the monthly time step, are available for research purposes, free of charge via the internet, like *NCDC-GHCN* (Peterson and Easterling, 1994) or *CRU* (New et al., 1999, 2000) or *SIEREM* (SIEREM, 2007; Boyer et al., 2004, 2006; Dieulin et al., 2006) data sets. They are often the only way for researchers to obtain rainfall data for remote areas of the world.

Satellite-derived rainfall data sets: The techniques for deriving rainfall amounts from satellite data are improving (Rouault et al.,

2001); however, the quality and the reliability of these data have yet to improve with respect to compatibility with data derived from ground measurements (Hughes, 2006; Grimes and Diop, 2003).

The data sources

The three databases used to describe the monthly rainfall between the years 1922 and 1998 in Burkina-Faso are (Table 1):

- *CRU*: gridded data extracted from the *CRU* global climate dataset (New et al., 1999; 2000), 2003 version.
- *SIEREM*: station data from the IRD 'SIEREM' database, which covers a large part of Africa, especially Francophone Africa (Mahé et al., 2001). The data include Burkina-Faso National Meteorological services data published under an agreement between CIEH, ASECNA and ORSTOM (CIEH, a; b), updated after 1980 with data extracted from the National Meteorology Service database, checked for main errors. Data are interpolated to a 0.5° latitude/longitude grid using kriging (Delhomme, 1976), and are available on the HSM website (SIEREM, 2007).
- *METEO*: the Burkina-Faso National Meteorological database was used for free for creating the *METEO* gridded data set with the same kriging method than for the *SIEREM* one.

Each dataset has a different network over Burkina-Faso (Figs. 1 and 2). The *CRU* dataset has the lowest number of stations. The number of stations increases over the western part of the country over the period 1950 to 1980 (Table 1). This dataset has a markedly unequal distribution over the Burkinabe territory, with a much lower density in the eastern half of the country. For the rest of the study, we distinguished between the western and eastern parts of the country, divided along longitude 2°W, because of the great difference of density of the *CRU* network on either side of this divide.

The *SIEREM* and the *METEO* datasets contain the same stations as *CRU*, but they also include a number of stations with shorter time series, apart from the national protected areas of the extreme eastern and south-eastern regions that are not very well covered. This provides a more even spatial distribution over the Burkinabe territory. The differences between *SIEREM* and *METEO* are primarily due to a few station-years between 1970 and 1990, where *SIEREM* has improved coverage from various sources, and to greater quality control leading to the removal of several highly unreliable data series.

TABLE 1
Characteristics of gridded rainfall data used in this study

Origin of data	CRU	METEO	SIEREM
	CRU stations	National meteorology	HSM stations
Data review	Yes	No	Yes
Removing stations with too short time series	Yes	No	No
Maximum Number of stations over Burkina-Faso	65	160	156
Mean number of stations each year	28	70	80
Mean number of years for each station	33	34	37
Number of station-years between 1922 and 1998 :	2 157	5 454	6 003
-0 West of 2°W	1 881	2 786	3 120
-1 East of 2°W	276	2 668	2 883
Mean	821	824	831
Median	816	819	832
Standard deviation	240	241	230
Minimum	155	163	203
Maximum	1 990	2 306	1 914

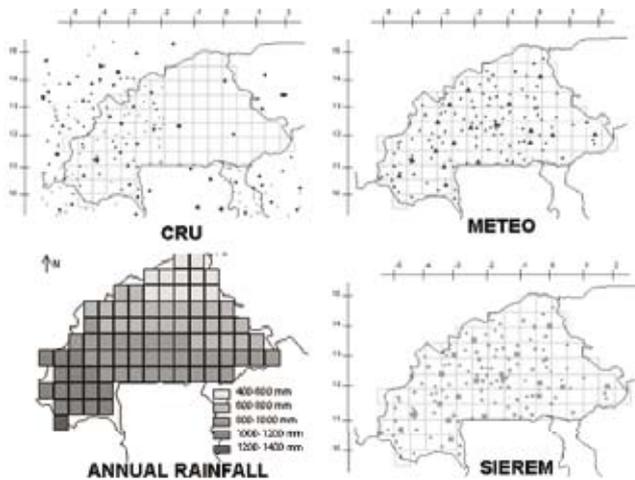


Figure 1

Rainfall stations used for the construction of the three rainfall grids (larger dots show synoptic and main climatological stations, with less than 20% of missing data over the period 1922-1998) and annual rainfall (after CRU)

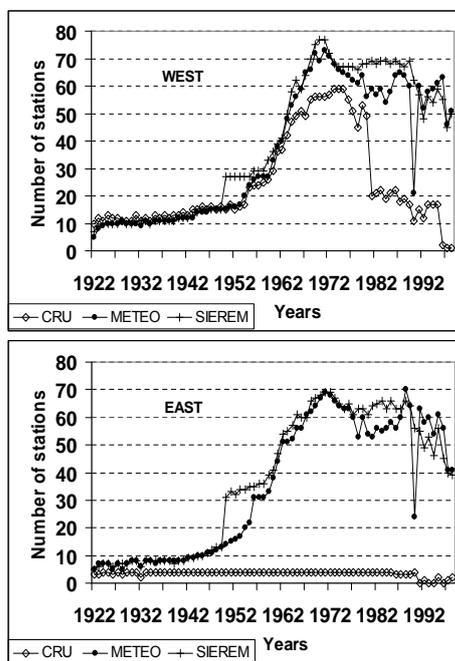


Figure 2

Number of stations for the three gridded datasets within the eastern and western parts of the country

Analysis

We analysed the spatial and temporal distribution of annual rainfall amounts for each of the 86 grid points located in the Burkina territory, during the period 1922 to 1998. We calculated, mesh by mesh and year by year, the deviations between grids according to the following simple but robust formula:

$$\%diff (val_gr1; val_gr2) = 100 * \frac{ABS (val_gr1 - val_gr2)}{[(val_gr1 + val_gr2) / 2]} \quad (1)$$

where:

val_gr1 = value grid 1
val_gr2 = value grid 2
ABS = absolute value

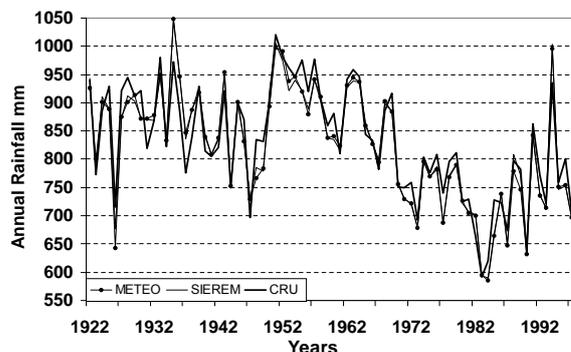


Figure 3

Mean annual rainfall for all grid points for the 3 gridded data sets

We then analysed the differences between the grids all over the entire territory and through the period of record.

Results of the comparative analysis

The main sources of error in the construction of gridded climate data from station records are partly due to the quality of the data (instrument and information management errors in the databases), the interpolation method used and the network density and distribution (New et al., 2000; Willmott et al., 1996; Briggs and Cogley, 1996; Wahba, 1990). According to the number of stations and the geometry of the station network, the resolution of 0.5° is a good choice for the majority of countries in West Africa to correctly represent the monthly rainfall fields. In the sections that follow we quantify the differences between the 3 gridded datasets, and make an assessment of the relative contribution of station density and interpolation method to these differences.

Annual rainfall

Annual rainfalls calculated from each data set *CRU*, *SIEREM* and *METEO* are very similar (Fig. 3). Mean, standard deviation and minimum values are very close (Table 1), and only maximum values show some differences between *SIEREM* and the two other grids. It is therefore surprising that the study found that there were a number of other differences arising from the use of these three grids.

Time-evolution of differences

We first look at the time-evolution of differences between grids over the study area as a whole. Figure 4 shows the area-averaged differences between grids for annual rainfall; for each of three possible grid-pairings, grid-point differences (Eq. (1)) for annual rainfall were calculated, and the mean of all 86 grid-point values was then determined; the three area-averaged annual values were then combined into a single mean annual difference. The mean differences show marked inter-annual variability, as well as an increase after the mid-1970s, coincident with the Sahelian drought. In general, drier years are associated with larger differences between grids. There are only slight differences between pair of grids *SIEREM* and *METEO* while the differences of *SIEREM* and *METEO* values with *CRU* are much greater (Fig. 5).

The temporal evolution of the differences between the grids *CRU* and *SIEREM* in the western part of Burkina-Faso clearly shows the influence of the number of stations (Fig. 6). Similar results arise from other combinations of grids. As might be expected, differences remain small when the network is similar

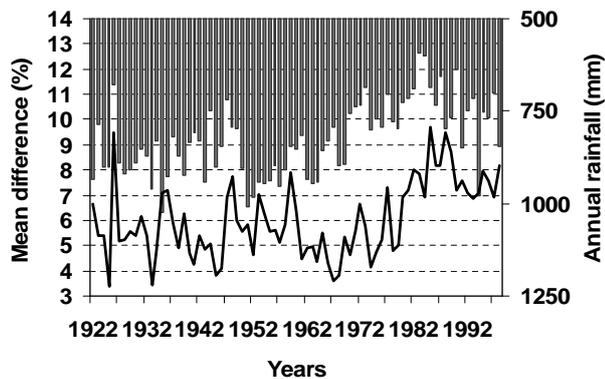


Figure 4

Annual variability of the mean differences between the three rainfall grids over Burkina-Faso (line) and their relation to area-averaged rainfall totals (bars)

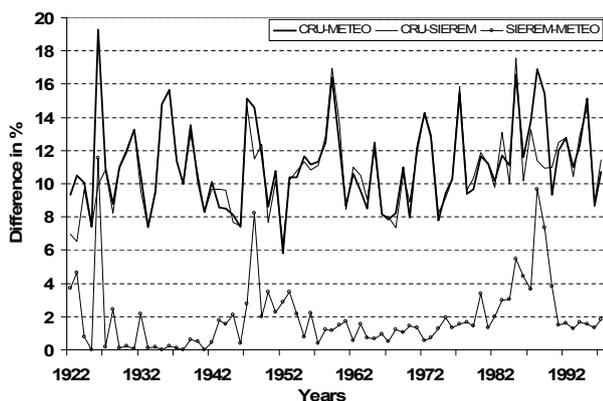


Figure 5

Annual variability of the differences (%) between the three rainfall grids over Burkina-Faso: CRU-METEO (bold line), CRU-SIEREM (thin line), SIEREM-METEO (thin dotted line)

(up to 1980), and are lowest when the network is both similar and relatively large (1960 to 1980). From 1981, differences are larger, a reflection of the reduced network density in CRU (while SIEREM and METEO remain relatively constant).

Spatial patterns of difference

Figure 7 shows the spatial distribution of the mean differences calculated from monthly rainfall. The CRU grid shows some large differences to SIEREM, up to 20% at grid points in the border areas. The large differences in the borders are a reflection of the different network. CRU also show larger differences in the eastern parts of the territory, where the network of stations used by the CRU is less dense than SIEREM or METEO. The SIEREM and METEO grids show only minor differences to each other (less than 4%) except for 5 grid points in the south-eastern part of the country where the network is less dense. These observations are confirmed by grid-point Student's t-tests for differences in the mean, showing no differences between SIEREM and METEO data but several grid points with differences between CRU and SIEREM databases (Fig. 8).

Mean differences over Burkina-Faso

Table 2 shows, for the period 1922 to 1998, mean percentages of differences between the grids over the western and the eastern parts of the country, defined by the 2°W meridian. SIEREM and

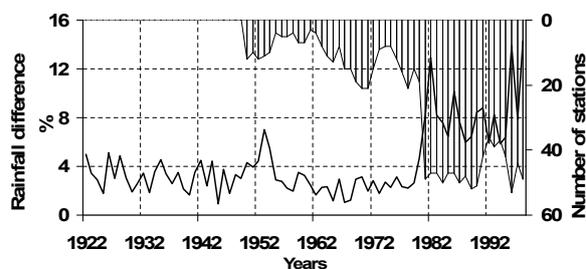


Figure 6

Annual variability of the mean differences between rainfall grids CRU and SIEREM: difference in the number of stations (bars) and in the rainfall amount in the western Burkina-Faso (line) (%)

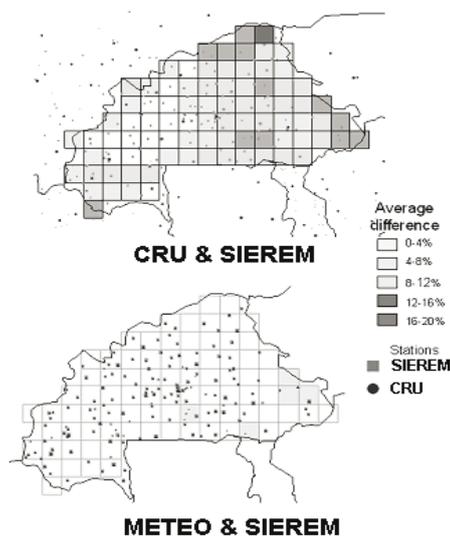


Figure 7

Spatial variability of the time-averaged differences between two pairs of grids, and location of the stations used

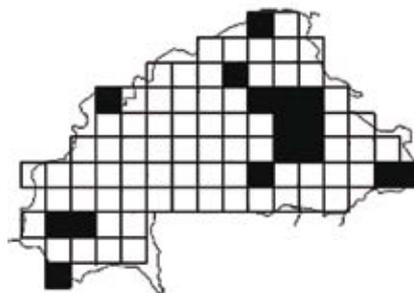


Figure 8

Results of the Student's t-test for difference in means (90% significance level shaded) between CRU and SIEREM databases

METEO are only slightly different from each other, with a mean difference of 1.1% and 2.1% in the west and east, respectively. The CRU grid shows much larger differences from both the SIEREM and METEO grids, with 4.3% in the west and between 10.2 and 11.2 in the east, where the density of the networks is different.

Increasing the number of stations from 34 (1998 version of the CRU dataset) to 65 (this study; 2003 CRU dataset version), distributed only in the western part of the basin (see Fig. 2) leads to a reduction of 30% of the difference between rainfall values of CRU and other data sets (results not shown). This is not the case in the eastern part of the basin, where the recent CRU dataset has not incorporated more stations. These differences are higher than those cited by Ali et al. (2005), who refer to studies in southern

WEST				EAST			
Grids	CRU	METEO	SIEREM	Grids	CRU	METEO	SIEREM
CRU	0	4.3	4.3	CRU	0	11.2	10.7
METEO		0	1.1	METEO		0	2.1
SIEREM			0	SIEREM			0

Niger which assess the effect of station network density on precipitation estimates. They report a bias of 10 to 15% when using a degraded network of 5 stations over 10 000 km², compared to a network of 10 stations over the same area.

It is most probable that the rainfall data of *SIEREM* and *METEO* grids are more representative of the ground truth than the data of the *CRU* grid. This means that in the study area at least, it is better to use as many stations as possible to compute rainfall grids. The runoff-rainfall modelling we use hereafter in this study has two objectives. Firstly, it assists in assessing the significance of increasing the number of stations, assuming that the rainfall data which are closer to the ground truth will lead to better runoff simulations, described by higher Nash criteria (all other variables being identical). Secondly, it is used to assess the impact of using different gridded-rainfall data sets on runoff simulation accuracy, in the context of water resource availability estimation.

Impacts on the river flow modelling

We have shown that different existing precipitation grids, nominally describing the same surface climate element, vary significantly across the study area, depending on the station network used to generate the gridded data. This is a confirmation of what has been found in other cases, but it is important to emphasise this point before evaluating the effect of such differences on river flows simulated with a hydrological model.

Data and method

Previous work has evaluated two different hydrological models (GR2M described by Makhlouf, 1994 and WBM described by Vorosmarty et al., 1989 and Conway, 1997) over 50 river basins in West Africa, using several different sets of data for potential evapotranspiration (PE) and soil-water holding capacity (WHC) (Paturel et al., 2003a; Dezetter et al., 2008). For West African river regimes the results indicated that the best combination of model, PE, WHC and calibration/optimisation was:

- GR2M hydrological model (better than the WBM)
- Standard Penman PE formulae, better than reference crop PE, calculated after Shuttleworth (1993)
- WHC, calculated from the FAO digital soil map of the world, (FAO, 1981; Girard et al. 2002), and considering the maximum value of the range given by the FAO (better than the Dunne and Willmott (1996) WHC dataset)

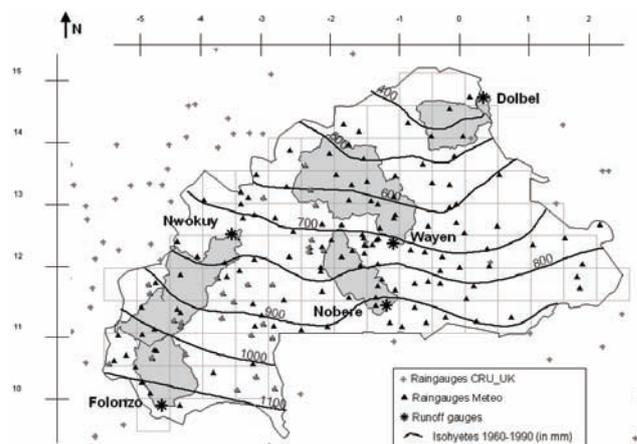


Figure 9

Location of the catchments studied, along with the mean annual rainfall isohyets and the CRU and METEO rain-gauge network

- Calibration using the series of Rosenbrock methods (Guilbot, 1971; Servat, 1986) and Nelder and Mead (Servat, 1993).

We chose 5 catchments in Burkina-Faso (Fig. 9 and Table 3). These catchments are between 7 500 to 20 000 km² in size, and distributed over Burkina-Faso such that they encompass the North-South gradient of rainfall, which varies from 400 to 1 100 mm. The mean annual runoff coefficient varies between 2 and 8% and runoff is not perennial, except for the Nwokuy River, in the Mouhoun basin (71% of runoff in July to October period, Table 3).

We simulate runoff in each catchment using each of the three rainfall grids: *CRU*, *METEO*, *SIEREM*. A split-sample procedure is followed, running a calibration on two-thirds of the available time series of flows (18 to 30 years depending on the specific catchment) and a validation on the last third part of the time series. Our comparison covers data from the calibration period and the performance of the model is evaluated using the Nash criteria (Nash and Sutcliffe, 1970; Perrin, 2000), which compares simulated flow (*S*) against the mean of observed (*O*) discharges, and is effectively a standardised MSE, with a maximum possible value of 100%:

$$E = 100 \frac{\sum_{i=1}^n (O_i - \bar{O})^2 - \sum_{i=1}^n (S_i - O_i)^2}{\sum_{i=1}^n (O_i - \bar{O})^2} \quad (2)$$

	Station name	Basin	Surf. Km ²	Annual rainfall (mm)	Annual runoff (l/s)	% Coef. runoff	% of runoff in JASO	Runoff time series		
								Period	Length	% missing data
WEST Long < -0.2	Folortzo	Comoe	8366	1028	16273	5.9	95	1969-95	27	23
	Nwokuy	Mouhoun	15464	1025	27550	5.5	71	1955-95	46	15
	Wayen	Nakambe	20241	590	10254	2.7	98	1955-95	41	21
EAST Long > -0.2	Nobere	Nazinon	7850	759	5194	2.7	94	1965-95	31	24
	Dolbel	Gorouol	7505	442	8440	8.0	98	1961-95	35	4

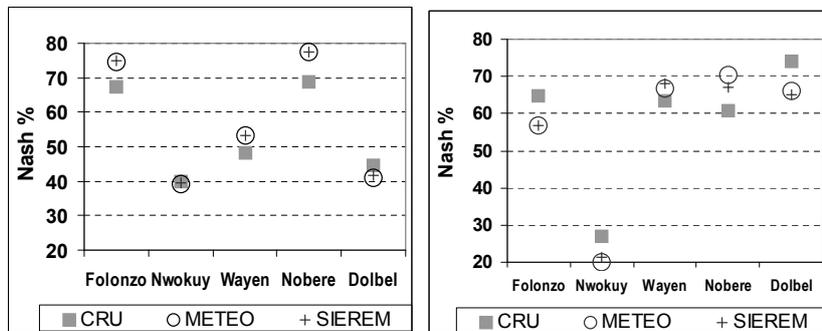


Figure 10
Nash criteria (%), during calibration (left) and validation (right), for simulated-observed flow in each catchment using the three rainfall grids (ranged from West (left) to East (right))

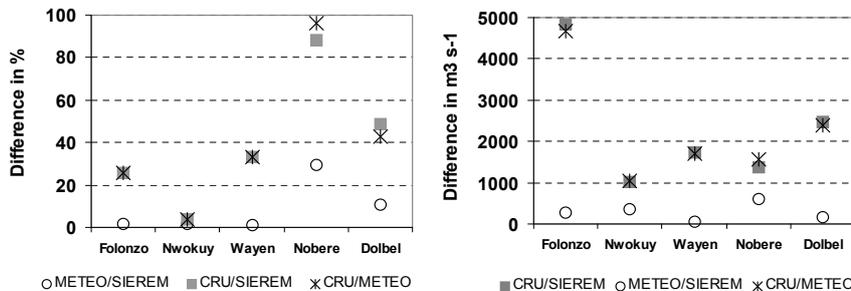


Figure 11
Mean difference in monthly runoff for simulations with different pairs of rainfall grids. Left panel is in percent (Eq. (1)) and right panel in absolute units

Results for the validation period are similar to those of the calibration period, but with lower values most of time, and are not shown here. In addition, for each combination of grids, we compared the differences between the monthly flows, expressed in both percentage (Eq. (1)) and absolute values. As before, we distinguish between the eastern and western parts of the country, on each side of the 2°W meridian.

Results

Simulations using the *METEO* and *SIEREM* grid produce the best results for the Nash criteria for 3 catchments (Folonzo, Wayen and Nobere), and the mean of the Nash criteria is 57% over the 5 catchments (Fig. 10); the Nash criteria are higher for simulations using *SIEREM* or *METEO* than the *CRU* precipitation grid, between 50% and 80%. For the two other catchments (Nwokuy and Dolbel), the Nash criteria are similar with the 3 grids, around 40%. Table 4 shows, for each pair of grids, the percentage difference between the Nash criteria (calculated according to Eq. (1)). The relative differences in the criteria for the *METEO* and *SIEREM* grids are very low (<1%), but are highest between both the *METEO/SIEREM* and *CRU*, and are twice as high for the catchments of the eastern half of the country (9.2 to 9.9%) than for catchments in the western half (5.9 to 6%). The differences in the Nash criteria are comparable to the mean differences in the rainfall data, which are about 4% in the west and from 10.7 to 11.2% in the east (Table 2).

When the actual flows simulated in the 5 catchments are compared (Fig. 11), the largest differences are observed between simulations using the *CRU* and *SIEREM/METEO* grids: up to 90% between *CRU* and *SIEREM/METEO*. The smallest differences are between the *SIEREM* and *METEO* grids, as would be expected from the similarity of the precipitation data in these two grids. As seen in Table 5, the highest differences are for the catchments located in the east (about 70%) where the measurement network is less dense. The differences between the rainfall grids are amplified in the hydrological response, with differences four times higher in the East than in the west in absolute values ($\text{m}^3\cdot\text{s}^{-1}$).

Figure 12 shows the difference in mean monthly flow using *CRU* and *SIEREM*. Relative differences are largest during periods of low flow (up to 80%), but have relatively low absolute values

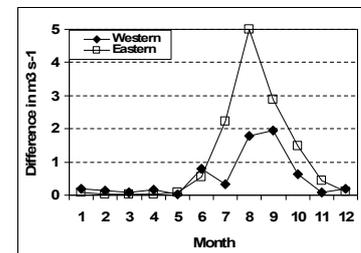
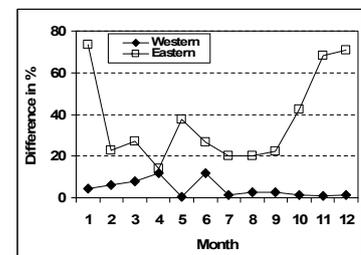


Figure 12
Difference in % and $\text{m}^3\cdot\text{s}^{-1}$ between calculated runoff from *CRU* and *SIEREM* grids, for western basins (Folonzo and Nwokuy) and eastern basins (Dolbel and Nobere)

(less than $1 \text{ m}^3\cdot\text{s}^{-1}$). Conversely, during high-flow months (from July to October), which represent between 70 and 97% of the annual discharge, the relative differences in flow are smaller (less than 40%), but with a greater impact on absolute values up to $5 \text{ m}^3\cdot\text{s}^{-1}$. The eastern catchments show the greatest percentage differences, particularly in the dry periods. This is due to the combined effect of the rainfall grids varying too much in the east, and to lower rainfall amounts in the eastern catchments, compared to the catchments in the west. For the Wayen catchment, which is in the centre of the country, with half of the catchment in each of the western and eastern parts of the country, the results for the simulated runoff are between those observed in the eastern and western parts (Table 5).

Synthesis and conclusions

Our analysis has enabled us to investigate the sensitivity of river flows simulated by gridded hydrological modelling, to the quality of available gridded monthly rainfall data sets.

WEST - Nwokuy-Folonzo				EAST- Nobere - Dolbel				Wayen			
% avg diff.	CRU	% avg diff.	SIEREM	% avg diff.	CRU	METEO	SIEREM	% avg diff.	CRU	METEO	SIEREM
CRU	0	6.0	5.9	CRU	0	9.9	9.2	CRU	0	9.8	10.1
METEO		0	0.9	METEO		0	0.7	METEO		0	0.3
SIEREM			0	SIEREM			0	SIEREM			0

WEST- Nwokuy-Folonzo				EAST- Nobere - Dolbel				Wayen			
% avg diff.	CRU	% avg diff.	SIEREM	% avg diff.	CRU	METEO	SIEREM	% avg diff.	CRU	METEO	SIEREM
CRU	0	14.8	14.8	CRU	0	69.5	68.4	CRU	0	33.0	32.9
METEO		0	1.6	METEO		0	20.2	METEO		0	1.0
SIEREM			0	SIEREM			0	SIEREM			0

Despite mean, minimum, standard deviation and inter-annual variability being very similar, the three gridded data sets used show an important spatial variability of values with time. The three different rainfall grids produce differences in mean rainfall of 4 to 11%, depending on the grids that are compared. While these results are obviously specific to the station networks and interpolation method used, they provide an indication of the differences that can arise.

Comparison of the rainfall grids has shown that differences between the precipitation grids are more pronounced during years when the rainfall is lower; this also applies to areas where the rainfall is lower. These differences have several causes including the quality of the data (instrumental errors, recording error, point or systematic errors) and the interpolation method which are not discussed here. This study has focused on the differences related to the variability in the density of the measurement network and its impact on the calculation of the hydrological balance. Our comparison has provided insight into the relative influence of these biases on the quality of the grids. The improvement of the data quality (*SIEREM* grid compared to *METEO* grid) has not had a significant influence on the quality of the grid, but the improved coverage in the east in both *SIEREM* and *METEO* has produced quite large differences from *CRU*, about 4% in the west where the networks are more similar, and about 11% in the east where the *CRU* network is much sparser.

The maximum differences observed between the *CRU* and *SIEREM/METEO* grids, of about 11%, represent about 60mm of annual precipitation in northern Burkina-Faso and about 120mm in the south. These differences in precipitation input are amplified in the hydrological responses simulated by the GR2M model.

The impact of differences in the rainfall grids on simulated river flow is considerable: a mean difference of 10% between grids induces variations of the Nash criteria of about 10% and calculated variations of flows of about 30% during the flood period and about 60% for the rest of the year. Comparisons between the west and east of the country show that precipitation network density is very important for accurate flow prediction. In the eastern part of Burkina-Faso, where the number of stations are reduced, the differences between Nash criteria are about twice those in the west, and differences between simulated flows are 5 times higher in the east.

Ideally, the better rainfall gridded data sets should include as many stations as possible, while a quality review (*SIEREM*) of the raw data from National Services (*METEO*), seems to have little

effect on the results of runoff-rainfall modelling, despite the fact that there is a significant difference between grid-point rainfall values of *SIEREM* and *METEO*.

These results show the major impact of the quality of the rainfall dataset used for further purposes (runoff-rainfall modelling in this study) in countries where data are scarce, not fully quality controlled and difficult to access. It is of particular interest to be aware of these differences when considering the prediction of future runoff from GCM outputs. The hydrological models are calibrated and validated on existing gridded rainfall datasets. The model parameters that are obtained are used to run the model with future rainfall and PE data from GCM outputs (Ardoin-Bardin et al., 2006). This increases the uncertainty on the runoff prediction for future decades.

It would be a great help, in particular for the scientific community, if one reference rainfall gridded data set could be updated for West and Central Africa, and be made freely available via an internet website. The Agrhymet Center (CILSS) and the FRIEND-AOC network of hydrologists (UNESCO) could collaborate for this purpose, for example on the basis of the FRIEND-AOC rainfall database which is coordinated by UCAD in Senegal. For now, the *SIEREM* gridded database has been put on the web for the purpose of African rainfall studies and will be maintained and updated as well as possible, with the help of all willing national services, guaranteed by the fact that only gridded data are available through this database. Quick communication of monthly data for synoptic rain gauges would allow rapid updating of rainfall indices as presented by L'Hote et al. (2003) over the Sahel.

Acknowledgements

The authors wish to thank the Direction Nationale de la Meteorologie and the Direction Generale de l'Inventaire des Ressources Hydrauliques of Burkina-Faso for providing data.

References

- ALI A, AMANI A, DIEDHIOU A and LEBEL T (2005) Rainfall estimation in the Sahel. Part 2: Evaluation of Raingauge Networks in the CILSS Countries and Objective Intercomparison of Rainfall Products. *J. Appl. Meteor.* **44** (11) 1707-1722.
- ARDOIN-BARDIN S, DEZETTER A, SERVAT E, DIEULIN C, CASNAVE L, NIEL H, PATUREL JE and MAHE G (2006) Application of climatic scenarios in hydrological modelling: using GCM outputs. *IAHS Publ.* **308** 436-441.

- BOYER JF, SERVAT E and DIEULIN C (2004) A specific method of modeling and designing environmental information systems. The example of SIEREM, an environmental information system for water resources. *Proc. BALWOIS Conf.* May 2004, Ohrid, Macedonia.
- BOYER JF, DIEULIN C, ROUCHE N, CRES A, SERVAT E, PATUREL JE and MAHE G (2006) SIEREM an environmental information system for water resources. *IAHS Publ.* **308** 19-25.
- BRIGGS PR and COGLEY JG (1996) Topographic bias in mesoscale precipitation networks. *J. Clim.* **9** 205-218.
- CIEH (a) *Annales des Precipitations Journalieres de l'Origine des Stations a 1965*. CIEH – Secretariat d'Etat aux Affaires Etrangeres charge de la Cooperation – ORSTOM. Benin, 1973, 522 p.; Burkina-Faso, 1977, 686 p.; Cameroun, 1978, tome 1, 512 p. tome 2, 906 p.; Centrafrique, 1990, 678 p.; Congo, 1981, 1026 p.; Gabon, 1979, 404 p.; Cote d'Ivoire, 1973, 688 p.; Mali, 1974, 1082 p.; Mauritanie, 1977, 314 p.; Niger, 1976, 506 p.; Senegal, 1976, 872 p.; Tchad, 1973, 644 p.; Togo, 1977, 578 pp.
- CIEH (b) *Annales des Precipitations Journalieres de 1966 a 1980*. CIEH-ASECNA-ORSTOM. Benin, 1989, 298 p.; Burkina-Faso 1989, 656 p.; Cameroun, 1990, 747 p.; Centrafrique, 1990, 450 p.; Congo, 1989, 642 p.; Gabon, 1989, 279 p.; Cote d'Ivoire, 1989, 609 p.; Mali, 1989, 782 p.; Mauritanie, 1990, 181 p.; Niger, 1990, 372 p.; Senegal, 1990, 675 p.; Tchad, 1990, 466 p.; Togo, 1989, 369 p.
- CONWAY D (1997) A water balance model of the Upper Blue Nile in Ethiopia. *Hydrol. Sci. J.* **42** 841-859.
- DELHOMME JP (1976) *Application De La Theorie Des Variables Regionalisees Dans Les Sciences De L'eau*. These de Docteur Ingenieur, Paris 6, Ecole des Mines de Paris, 130p.
- DEZETTER A, GIRARD S, PATUREL JE, MAHE G, ARDOIN-BARDIN S and SERVAT E (2008) Runoff simulation in West Africa: implementation of a spatialized monthly modelling process. *J. Hydrol.* **354** 203-212.
- DIEULIN C, BOYER JF, ARDOIN-BARDIN S and DEZETTER A (2006) The contribution of GIS to hydrological modelling. *IAHS Publ.* **308** 68-74.
- DONG XH, DOHMEN-JANSSEN CM and BOOIJ MJ (2005) Appropriate spatial sampling of rainfall for flow simulation. *Hydrol. Sci. J.* **50** (2) 279-298.
- DUNNE KA and WILLMOTT CJ (1996) Global distribution of plant-extractable water capacity of soil. *Int. J. Clim.* **16** 841-589.
- FAO (1981) *Digital Soil Map of the World*. UNESCO.
- FRIEND-AOC (2007) <http://armspark.msem.univ-montp2.fr/friendaoc>
- GIRARD S, PATUREL JE, MAHE G, OUATTARA F and CRES A (2002) Spatialisation des pluies au Burkina-Faso : impact de la methode et de la source de donnees. *Sud Sciences Technologies* (2IE(ex-EIER) edn.) Ouagadougou, Burkina-Faso **9** 17-24.
- GRIMES DIF and DIOP M (2003) Satellite-based rainfall estimation for river flow forecasting in Africa. I: Rainfall estimates and hydrological forecasts. *Hydrol. Sci. J.* **48** (2) 567-584.
- GUILBOT A (1971) Processus d'optimisation en quatre etapes applique a la recherche des parametres des modeles deterministes. Laboratoire d'Hydrologie et de Modelisation. Universite Montpellier, note LHM 16/71
- HUGHES DA (1995) Monthly rainfall-runoff models applied to arid and semi-arid catchments for water-resource estimation purposes. *Hydrol. Sci. J.* **40** (6) 751-769.
- HUGHES DA (2006) Comparison of satellite rainfall data with observations from gauging station networks. *J. Hydrol.* **327** 399-410.
- L'HOTE Y, MAHE G and SOME B (2003) The 1990s rainfall in the Sahel: the third driest decade since the beginning of the century. Reply to discussion. *Hydrol. Sci. J.* **48** (3) 493-496.
- LEE K and OH NS (2006) Investigating the spatial scaling effect of the non-linear hydrological response to precipitation forcing in a physically based land surface model. *Water SA* **32** (2) 145-154. <http://www.wrc.org.za/downloads/watersa/2006/April%2006/1843.pdf>
- MAHE G and OLIVRY JC (1999) Assessment of freshwater yields to the ocean along the intertropical Atlantic coast of Africa. *Comptes Rendus de l'Academie des Sciences, Series IIa.* **328** 621-626.
- MAHE G, L'HOTE Y, OLIVRY JC and WOTLING G (2001) Trends and discontinuities in regional rainfall of West and Central Africa : 1951-1989. *Hydrol. Sci. J.* **46** (2) 211-226.
- MAKHLOUF Z (1994) *Complements Sur Le Modele Pluie-Debit GR4J Et Essai D'estimation De Ses Parametres*. These de doctorat, Universite Paris-Sud. 413 pp.
- NASH JE and SUTCLIFFE JV (1970) River flow forecasting through conceptual models. Part I – A discussion of principle. *J. Hydrol.* **10** 282-290.
- NEW M, HULME M and JONES P (1999) Representing twentieth century space-time climate variability. Part I: Development of a 1961-1990 mean monthly terrestrial climatology. *J. Clim.* **12** 829-856.
- NEW M, HULME M and JONES P (2000) Representing twentieth century space-time climate variability. Part II: Development of 1901-1990 monthly grids of terrestrial surface climate. *J. Clim.* **13** 2217-2238
- OUEDRAOGO M, PATUREL JE, MAHE G, SERVAT E, DEZETTER A and CONWAY D (2001) Influence de la nature et de l'origine des donnees sur la modelisation hydrologique de grands bassins versants en Afrique de l'Ouest. *IAHS Publ.* **270** 209-216.
- PATUREL JE, OUEDRAOGO M, SERVAT E, MAHE G, DEZETTER A and BOYER JF (2003a) The concept of hydropluviometric normal in West and central Africa in a context of climatic variability. *Hydrol. Sci. J.* **48** (1) 125-137.
- PATUREL JE, OUEDRAOGO M, MAHE G, SERVAT E and DEZETTER A (2003b) Utilisation de modeles hydrologiques pour evaluer les ressources en eau de surface et leur evolution spatio-temporelle – application a l'Afrique de l'Ouest. *IAHS Publ.* **280** 117-223.
- PERRIN C (2000) *Vers Une Amelioration D'un Modele Global Pluie-Debit Au Travers D'une Approche Comparative*. These de Doctorat, Institut National Polytechnique de Grenoble. 276 pp.
- PETERSON TC and EASTERLING DR (1994) Creation of homogeneous composite climatological reference series. *Int. J. Clim.* **14** 671-679.
- ROUAULT M, JOBARD I, WHITE SA and LUTJEHARMS JRE (2001) Studying rainfall events over South Africa and adjacent oceans using the TRMM satellite. *S. Afr. J. Sci.* **97** 455-460.
- RUBARENZYA MH, WILLEMS P and BERLAMON J (2007) Identification of uncertainty sources in distributed hydrological modelling: Case study of the Grote Nete catchment in Belgium. *Water SA* **33** (5) 429-436. <http://www.wrc.org.za/downloads/watersa/2007/Oct%2007/2166.pdf>.
- ST-HILAIRE A, OUARDA TBMJ, LACHANCE M, BOBEE B, GAUDET J and GIGNAC C (2003) Assessment of the impact of meteorological density on the estimation of basin precipitation and runoff: A case study. *Hydrol. Proc.* **17** (18) 3561-3580.
- SERVAT E (1986) *Presentation De Trois Modeles Globaux Conceptuels Et Deterministes: CREC5, MODGLO Et MODIBI*. Centre ORSTOM de Montpellier, Novembre 1986
- SERVAT E (1993) *Evaluation Regionale Des Ressources En Eau: Application A La Cote d'Ivoire*. Rapport de synthese du programme ERREAU. Antenne hydrologique ORSTOM Abidjan, 154 p.
- SHUTTLEWORTH WJ (1993) Evaporation. In: Maidment RD (ed.) *Handbook of Hydrology* (Chapter 4). McGraw-Hill, New-York.
- SIEREM (2007) <http://www.hydrosociences.fr/sierem>
- VOROSMARTY CJ, MOORE III B, GRACE AL, GILDEA MP, MELILLO JM, PETERSON BJ, RASTETTER ED and STEUDLER PA (1989) Continental-scale models of water balance and fluvial transport: An application to South America. *Global Biogeochem. Cycles* **3** (3) 241-265.
- WAHBA G (1990) Spline models for observational data. *Proc. CBMS-NSF Regional Conference Series in Applied Mathematics.* **59**. Date conference held? Philadelphia, PA: SIAM, XII.
- WILLMOTT CJ, ROBESON SM and JANIS MJ (1996) Comparison of approaches for estimating time-averaged precipitation using data from the United States. *Int. J. Clim.* **16** 1103-1115.
- WMO (2001) *World Meteorological Organization*. <http://www.wmo.ch/web/www/DPS/RA%20VI%20WG%20Commercialization%202001.htm/>